



## LED INDUSTRIAL LUMINAIRE IP65

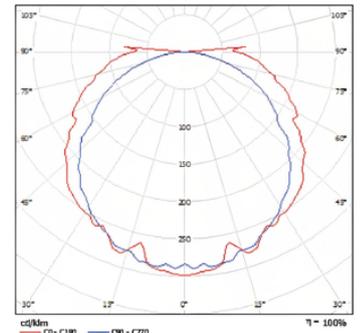

- Tridonic driver
- Color tolerance: 3 MacAdam steps
- Lifetime: >100,000 h (L80B50)
- CRI>80
- IP65
- Luminaire housing and diffuser made of polycarbonate (PC)
- Available on request:
  - 1-3 h emergency battery
  - Dimmable LED draiver

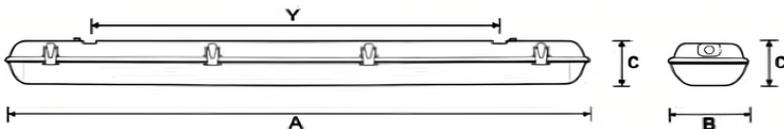

Product code	Luminous flux	Color temp.	Power W	Dimensions (AxBxCmm)	Y (cm)	Color rendering index (Ra)
HC-LED1200/830	3410lm	3000K	24W	1240x85x80	80	>80
HC-LED1200/840	3589lm	4000K	24W	1240x85x80	80	>80
HC-LED1201/830	4688lm	3000K	33W	1240x85x80	80	>80
HC-LED1201/840	4935lm	4000K	33W	1240x85x80	80	>80
HC-LED12014/830	5330lm	3000K	39W	1240x85x80	80	>80
HC-LED12014/840	5610lm	4000K	39W	1240x85x80	80	>80
HC-LED1202/830	5926lm	3000K	44W	1240x85x80	80	>80
HC-LED1202/840	6238lm	4000K	44W	1240x85x80	80	>80

HC-LED1500/830	7116lm	3000K	54W	1560x85x93	110	>80
HC-LED1500/840	7490lm	4000K	54W	1560x85x93	110	>80
HC-LED15001/830	6417lm	3000K	48W	1560x85x93	110	>80
HC-LED15001/840	6755lm	4000K	48W	1560x85x93	110	>80
HC-LED1501/830	5634lm	3000K	41W	1560x85x93	110	>80
HC-LED1501/840	5931lm	4000K	41W	1560x85x93	110	>80
HC-LED1502/830	4922lm	3000K	36W	1560x85x93	110	>80
HC-LED1502/840	5181lm	4000K	36W	1560x85x93	110	>80
HC-LED1503/830	4099lm	3000K	30W	1560x85x93	110	>80
HC-LED1503/840	4314lm	4000K	30W	1560x85x93	110	>80