

## Evakuatsioonivalgusti DP-8033

pind- ja süvispaigaldusega / ootellülitus (isetestiv)



DP-8033LC (OPEN)




DP-8033LX (CORRIDOR)





Fitting

### PRODUCT SIZE(LxWxH)

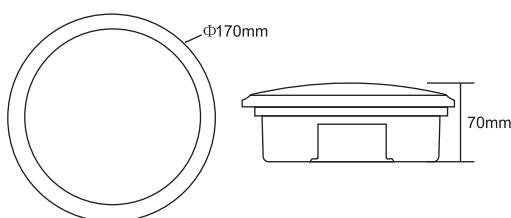

### LUMINOUS EFFICIENCY

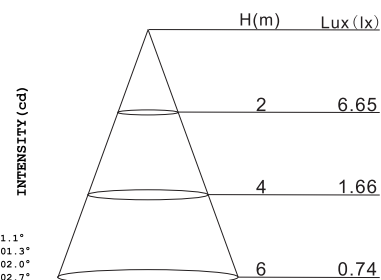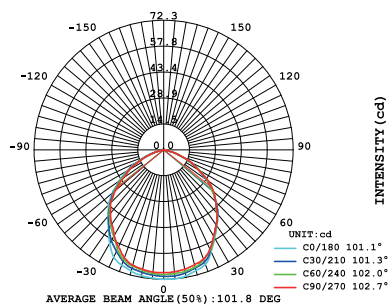

### PRODUCT PARAMETERS

Model No	Optical Parameters						Structural Parameters			
	Specification of Battery	Light Source	Emergency Time	Emergency Mode	Luminous Flux	Color Temperature	Material	Product Size(mm)	IP Rating	Certification
DP-8033L	3.7V2.6Ah Lithium Battery	3W SMD LED	3 hours	Non-Maintained	165lm	4000K	polycarbonate body and diffuser	170X170X70	IP 65	CE



IP 65

850°C

