

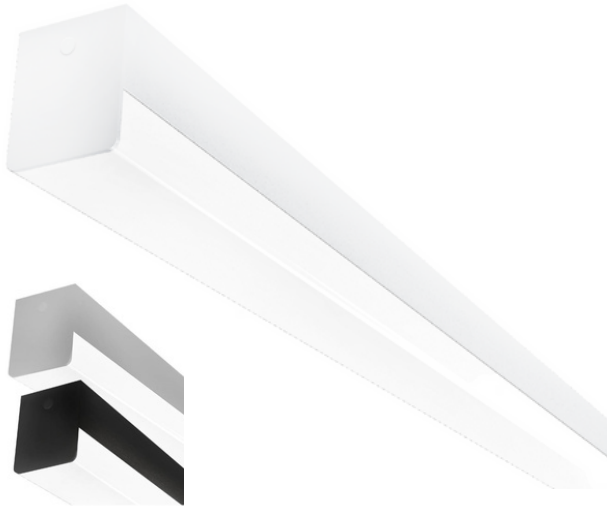


LED Profiilvalgusti NovaS

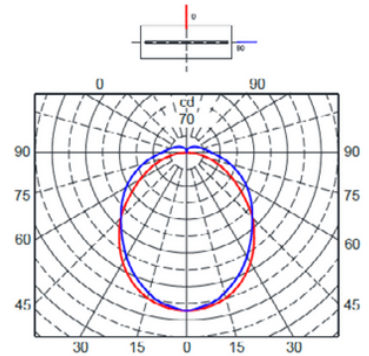

- DipSwitch driver
- Pindpaigaldus
(Riputamiseks eraldi tarvikud)
- 90° valgusviht
- Värviedastusindeks CRI > 80
- Värvitolerants 3 MacAdam'i sammu
- IP40
- Eluiga 80 000h
- Opaal PC

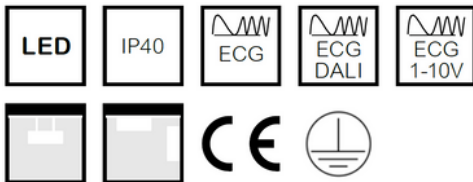

Tootekood	Nimetus	Mõõdud	Võimsus	Valgusvoog	Efektiivus	Värvi temp.	CRI
MARNOV.120-35-4600/9.4/IP4002W	Profiilvalgusti NovaS	1145x60x50mm	35W	4600lm	131lm/W	4000K	> 80
MARNOV.120-35-4380/9.3/IP4002W	Profiilvalgusti NovaS	1145x60x50mm	35W	4380lm	125lm/W	3000K	> 80

CONTROL LUMEN FLUX AND POWER VIA DIP SWITCH FUNCTION								
Current (mA)	Dip Switch settings				Power (W)	Efficacy at different CCT (lm)		
	1	2	3	4		3000K	4000K	5000K
325	-	-	-	-	24	2820	2960	3100
350	-	-	-	ON	26	3050	3200	3360
400	-	-	ON	ON	30	3450	3620	3800
500	-	ON	ON	ON	35	4380	4600	4830