


LED Moodulvalgusti ELA ADV2



- Tridonicu driver
- Süvispaigaldus
(pindpaigalduseks ja riputamiseks eraldi tarvikud)
- Sobib paigalduseks 1200x300 moodullakke
- Värviedastusindeks CRI > 80
- Värvitolerants 4 MacAdam'i sammu
- UGR <19
- Eluiga 50 000h
- PMMA


TRIDONIC

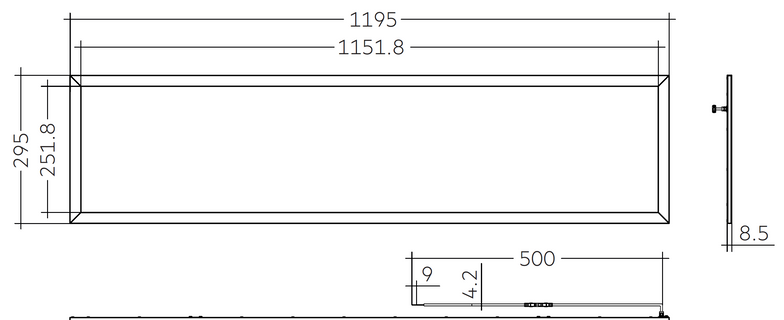

Tootekood	Nimetus	Mõõdud	Võimsus	Valgusvoog	Efektivsus	Värvi temp.	CRI
28003280	ELA 1200x300mm 3800lm 840 ADV2	1195x295 x8,5mm	31.6W	3432lm	110lm/W	4000K	> 80
28003279	ELA 1200x300mm 3800lm 830 ADV2	1195x295 x8,5mm	31.6W	3404lm	109lm/W	3000K	> 80

Type®	Article number	Photometric code	Useful luminous flux at tp = 25 °C	Expected luminous flux at tp rated®	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C®	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
Operating mode HE at 600 mA											
ELA 1200x300mm 3800lm 840 ADV2	28003280	840/469	-	2,605 lm	600 mA	36.9 V	40.2 V	23.2 W	-	113 lm/W	> 80
Operating mode NM at 800 mA											
ELA 1200x300mm 3800lm 840 ADV2	28003280	840/469	3,670 lm	3,432 lm	800 mA	37.6 V	41.1 V	31.6 W	116 lm/W	110 lm/W	> 80
Operating mode HO at 900 mA											
ELA 1200x300mm 3800lm 840 ADV2	28003280	840/469	-	3,811 lm	900 mA	38.0 V	41.5 V	35.9 W	-	107 lm/W	> 80

Type®	Article number	Photometric code	Useful luminous flux at tp = 25 °C	Expected luminous flux at tp rated®	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C®	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
Operating mode HE at 600 mA											
ELA 1200x300mm 3800lm 830 ADV2	28003279	830/469	-	2,586 lm	600 mA	36.9 V	40.2 V	23.2 W	-	112 lm/W	> 80
Operating mode NM at 800 mA											
ELA 1200x300mm 3800lm 830 ADV2	28003279	830/469	3,620 lm	3,404 lm	800 mA	37.6 V	41.1 V	31.6 W	115 lm/W	109 lm/W	> 80
Operating mode HO at 900 mA											
ELA 1200x300mm 3800lm 830 ADV2	28003279	830/469	-	3,780 lm	900 mA	38.0 V	41.5 V	35.9 W	-	106 lm/W	> 80

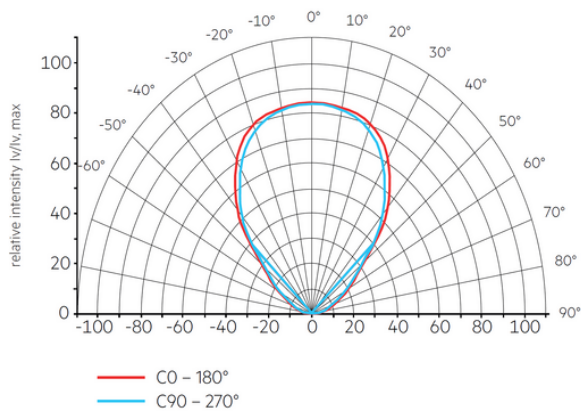

Type	Article number	Colour	Packaging	Weight per pc.
ACE Surface mount kit 1200x300mm AL WH	28003291	White	20 pc(s).	0.630 kg
ACE Suspension kit 1200x300mm STL SI	28003292	Silver	100 pc(s).	0.097 kg

