

Evakuatsioonivalgusti DP-8033 pind- ja süvispaigaldusega / ootellülitus



Komplekti kuulub
pindpaigaldusraam.





Fitting

TEHNILISED PARAMEETRID

Model No	Optical Parameters						Structural Parameters			
	Specification of Battery	Light Source	Emergency Time	Emergency Mode	Power	Light Source Luminous Flux	Material	Product Size (mm)	IP Rating	Certification
EX-DP8033LCS-NM (Open area)	3.7V 2.6Ah Lithium Battery	SMD LED	3 hour	Non-maintained	2.3W	175lm	Polycarbonate body and diffuser	Ø173x73	IP 65	CE
EX-DP8033LXS-NM (Corridor)	3.7V 2.6Ah Lithium Battery	SMD LED	3 hour	Non-maintained	2.3W	175lm	Polycarbonate body and diffuser	Ø173x73	IP 65	CE

Valgusvihu diameeter

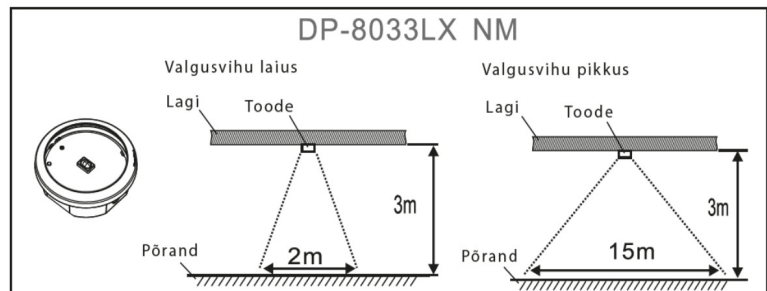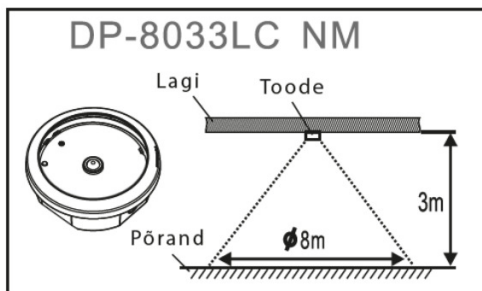

Lisainformatsiooni saamiseks palun pöörduda oma kliendihalduri poole.



IP 65

850°C

