

EVAKUATSIOONIVALGUSTI

DP-8011LC-NM (ISETESTIV)



DP-8011L




DP-8011LC
(OPEN)




DP-8011LX
(CORRIDOR)

MÕÕDUD

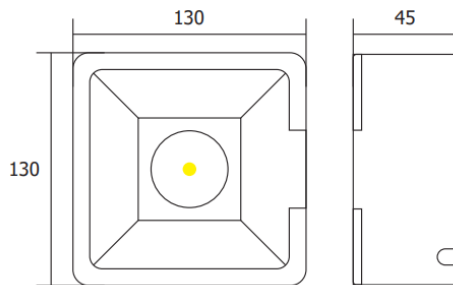

EFEKTIIVSUS

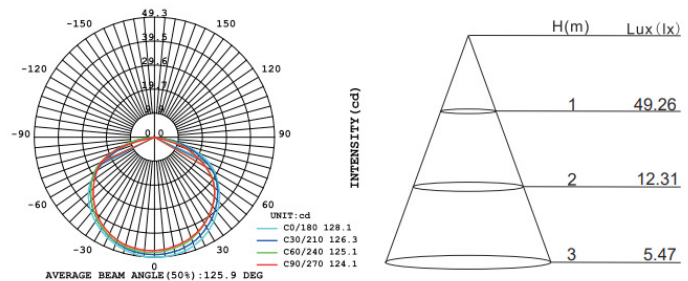

TEHNILISED PARAMEETRID

Model No	Optical Parameters						Structural Parameters			
	Specification of Battery	Light Source	Emergency Time	Emergency Mode	Power	Light Source Luminous Flux	Material	Product Size (mm)	IP Rating	Certification
DP-8011LC-NM	3.6V 2.0Ah Ni-Cd Battery	SMD LED	3 hour	Non-Maintained	2.8W	150lm	Polycarbonate body and diffuser	130x130x45	IP 20	CE

Lisainformatsiooni saamiseks palun pöörduda oma kliendihalduri poole.



IP 20

850°C

